

INDUSTRIAL NOZZLES - TFT

# HARDWARE



**Description**

The Task Force Tips® ZN and ZM INDUSTRIAL NOZZLES are a simple and rugged industrial nozzle with superior stream quality and reach. This fixed flow fog nozzle rated at 100 psi (7 bar) is available with an optional flow rate of 350, 500, 750, 1000 or 1250 (1325, 1893, 2839, 3785 or 4732 l/min).




The fog angle is user adjustable between 120 degree wide fog and straight stream. The nozzle's baffle can be removed with a wrench for flushing debris. The standard inlet is 2.5" NH, NPSH, or BSP (65 mm) female thread. The simple and basic design requires no grease or other maintenance. The rubber bumper is UV resistant. The fixed gpm water nozzle is hardcoat anodized ANSI A356.0 T6 aluminum. The fixed gpm nozzle can be used with water or premixed foam solution.



**Specifications**




K-factor	User Specified K-factor = 15 - 75
Operation Energy Source	Manual
Flow Control Method	Fixed flow at a pressure (constant flow rate; flow does not change with pattern)
Flow Rate	User Specified K-factor
Coupling Size (Nozzles)	2.5 inch (65 mm)
Coupling Style (Nozzles)	Rocker
Coupling Swiveling/Rigid (Nozzles)	Rigid
Pressure	100 psi (7 bar)
Fog Pattern Method	Molded rubber teeth (fixed)
Pattern Actuation Method	Manual
Nozzle Bumper Material	Rubber - press fit
Certifications	N/A

NOTE: Shown in full fog position



**SOLBERG is a member of PERIMETER SOLUTIONS, a global producer of leading fire retardant, gel and foam brands with a singular purpose: revolutionize the course of fire suppression technology with safer, more effective and more sustainable solutions. Together, we are Moving Industries Forward by Redefining Fire Suppression. [www.solbergfoam.com](http://www.solbergfoam.com)**

**Reach Charts**

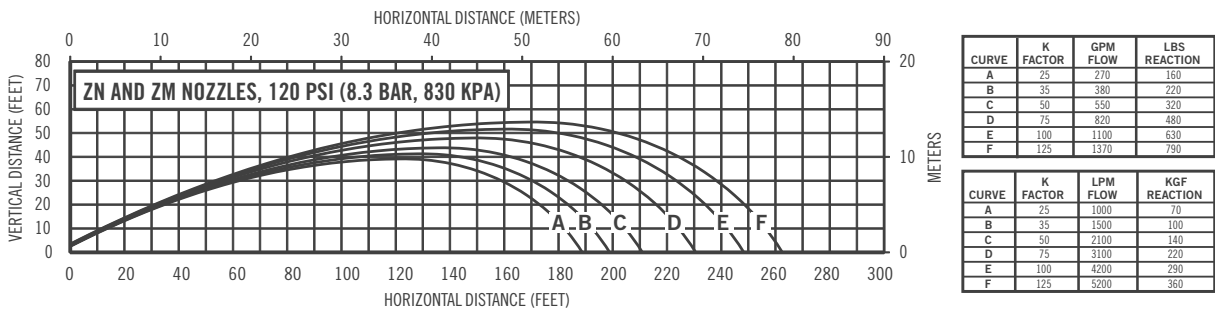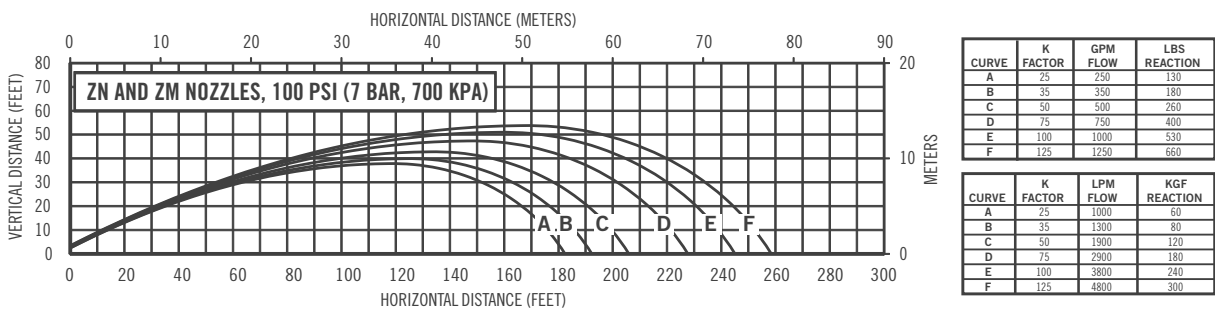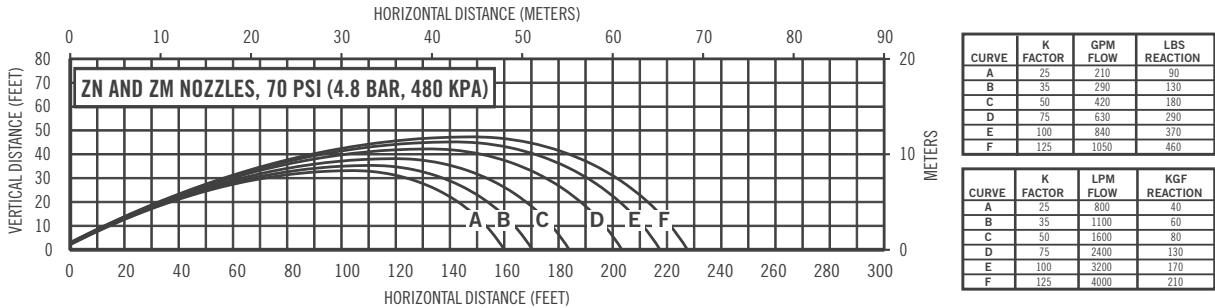

**Ordering Information**

**INDUSTRIAL NOZZLES**

PART NO.	DESCRIPTION	APPROXIMATE SHIPPING WEIGHT	
		lb	kg
32230	ZN Industrial Nozzle - TFT, 350 gpm (1325 l/min)	4	2
32231	ZN Industrial Nozzle - TFT, 500 gpm (1893 l/min)	4	2
32232	ZN Industrial Nozzle - TFT, 750 gpm (2839 l/min)	4	2
32237	ZM Industrial Nozzle - TFT, 1000 gpm (3785 l/min)	4	2
32238	ZM Industrial Nozzle - TFT, 1250 gpm (4732 l/min)	4	2

*Note: Must specify K-factor at time of order*



NOTICE: Perimeter Solutions makes no representations or warranties as to the completeness or accuracy of the information included herein. The information contained herein is not intended to provide regulatory, legal or expert advice relating to the products, its application or uses. Nothing contained herein is to be construed as a recommendation to use any product, process, equipment or formulation in conflict with any industrial property or intellectual property rights, and Perimeter Solutions makes no representation or warranty, express or implied, that the use thereof will not infringe on any industrial property or intellectual property rights. NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESSED OR IMPLIED, OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OF ANY OTHER NATURE ARE MADE HEREUNDER WITH RESPECT TO THE INFORMATION CONTAINED HEREIN.

SOLBERGFOAM.COM

FORM NUMBER F-2016011-1

COPYRIGHT © 2016. ALL RIGHTS RESERVED.  
SOLBERG IS A TRADEMARK OF PERIMETER SOLUTIONS OR ITS AFFILIATES. TASK FORCE TIPS AND TFT ARE REGISTERED TRADEMARKS OF TASK FORCE TIPS, INC.

**AMERICAS**  
PERIMETER SOLUTIONS, LP  
1520 Brookfield Avenue  
Green Bay, WI 54313  
USA  
Tel: +1 920 593 9445

**EMEA**  
PERIMETER SOLUTIONS, LP  
Poligono de Baiña, Parcela 23  
33682 Mieres (Asturias)  
Spain  
Tel: +34 985 24 29 45

**ASIA PACIFIC**  
PERIMETER SOLUTIONS, LP  
3 Charles Street  
St. Marys NSW 2760  
Australia  
Tel: +61 2 9673 5300