

SOLBERG® FOAM SYSTEM ACCESSORY VALVES

SWING CHECK VALVE

FEATURES

- Metal-to-metal seal
- Stainless steel body
- Female threaded end connections

DESCRIPTION

The SOLBERG® Swing Check Valve has a stainless steel disc for the internal movable part, which is on a hinge to block reverse flow. Swing Check Valves are available for use with most bladder tank foam systems. All valves are of stainless steel construction and have NPT connections with a maximum working pressure of 200 psi (14 bar). The Swing Check Valve prevents foam-water solution from draining through the existing fire sprinkler riser from a remote location, eliminating the need for personnel to go near or access concentrate piping and the foam tank assembly.

ORDERING INFORMATION

SWING CHECK VALVE		FACE TO FACE VALVE LENGTH		APPROXIMATE SHIPPING WEIGHT	
PART NO.	DESCRIPTION	in	mm	lb	kg
30400	Swing Check Valve, Stainless Steel, 1.0" NPT	3.54	89.91	1	0.5
30401	Swing Check Valve, Stainless Steel, 1.25" NPT	4.13	104.90	2	1
30402	Swing Check Valve, Stainless Steel, 1.5" NPT	4.72	119.88	3	1.5
30403	Swing Check Valve, Stainless Steel, 2.0" NPT	5.51	139.95	5	2
30404	Swing Check Valve, Stainless Steel, 2.5" NPT	6.08	154.43	9	4
30405	Swing Check Valve, Stainless Steel, 3.0" NPT	7.29	185.16	12	5



SOLBERG® FOAM SYSTEM ACCESSORY VALVES

WATER INLET & CONCENTRATE ISOLATION BALL VALVES

FEATURES

- Works with all SOLBERG foam concentrates
- Corrosion resistant material construction
- Easily identifiable open and closed positions

DESCRIPTION

Solberg offers Water Inlet and Concentrate Isolation Control Ball Valves for use with SOLBERG foam systems hardware. Both style valves are of stainless steel construction, RTFE seats, PTFE seals and NPT threaded connections. Water Inlet and Concentrate Isolation Control Ball Valves are supplied with nameplate, ring pin and chain to allow the valve to be visually monitored in an open or closed position.



ORDERING INFORMATION

WATER INLET & CONCENTRATE ISOLATION BALL VALVES		FACE TO FACE VALVE LENGTH		APPROXIMATE SHIPPING WEIGHT	
PART NO.	DESCRIPTION	in	mm	lb	kg
30410	Water Inlet Ball Valve, Stainless Steel, Threaded, 1.0", NPT	3.26	82.80	1	.5
30411	Water Inlet Ball Valve, Stainless Steel, Threaded, 1.25", NPT	3.82	97.02	1	.5
30412	Water Inlet Ball Valve, Stainless Steel, Threaded, 1.5", NPT	4.29	108.96	5	2
30413	Water Inlet Ball Valve, Stainless Steel, Threaded, 2.0", NPT	5.08	129.03	8	4
30414	Water Inlet Ball Valve, Stainless Steel, Threaded, 2.5", NPT	6.56	166.62	16	7
30415	Water Inlet Ball Valve, Stainless Steel, Threaded, 3.0", NPT	7.56	192.02	23	10
30420	Concentrate Isolation Ball Valve, Stainless Steel, Threaded, 1.0", NPT	3.26	82.80	1	.5
30421	Concentrate Isolation Ball Valve, Stainless Steel, Threaded, 1.25", NPT	3.82	97.02	1	.5
30422	Concentrate Isolation Ball Valve, Stainless Steel, Threaded, 1.5", NPT	4.29	108.96	5	2
30423	Concentrate Isolation Ball Valve, Stainless Steel, Threaded, 2.0", NPT	5.08	129.03	8	4
30424	Concentrate Isolation Ball Valve, Stainless Steel, Threaded, 2.5", NPT	6.56	166.62	16	7
30425	Concentrate Isolation Ball Valve, Stainless Steel, Threaded, 3.0", NPT	7.56	192.02	23	10

SOLBERG® FOAM SYSTEM ACCESSORY VALVES

PRESSURE REDUCING VALVE


FEATURES

- Rugged brass body
- Stainless steel stem and spring
- Oversized orifice
- Standard 0.125 in (3mm) gauge port (plugged)
- Slotted and knurled heavy duty adjusting screw

DESCRIPTION

The SOLBERG® mini Pressure Reducing Valve (PRV) is designed to reduce incoming water pressure to a sensible level to protect foam system components. The PRV is constructed with a brass body, stainless steel stem and spring, Buna-N seats and diaphragm. The maximum working pressure is 300 psi (21 bar) with a temperature range of 33°F - 140°F (0.5°C - 60°C). The PRV is placed in the sensing line between the hydraulic concentrate ball valve and the sprinkler actuating valve (alarm check, deluge, etc.) when the system water pressure will meet or exceed 160 psi (11 bar).

TYPICAL PIPING ISOMETRIC

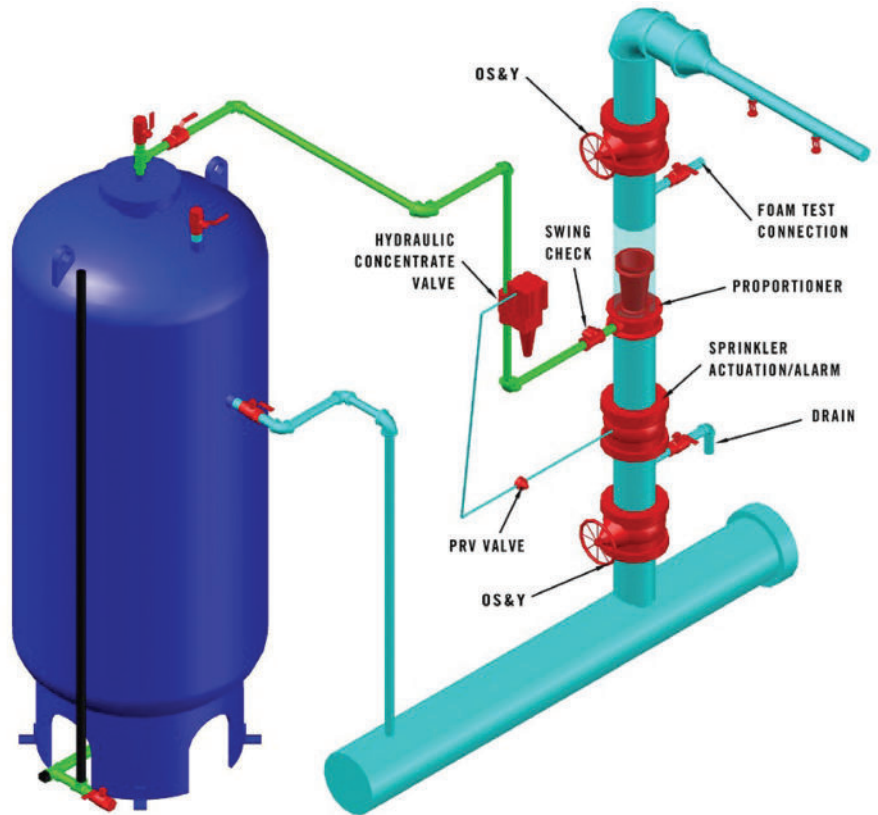

ORDERING INFORMATION

PRESSURE REDUCING VALVE		APPROXIMATE SHIPPING WEIGHT	
PART NO.	DESCRIPTION	lb	kg
30360	Pressure Reducing Valve, 0.25"	5	0.14



Solutions That Save.

FOR MORE INFORMATION

Contact any of our worldwide Perimeter Solutions Fire Safety offices or visit:

www.Perimeter-Solutions.com

UNITED STATES

10667 Jersey Blvd.
Rancho Cucamonga, CA 91730

Tel: +1 800 682 3626

Tel: +1 909 983 0772

salesfoamusa@perimeter-solutions.com

EMEA

Polígono de Baiña, Parcela 23
33682 Mieres (Asturias)

Spain

Tel: +34 985 24 29 45

salesfoamemea@perimeter-solutions.com

ASIA PACIFIC

3 Charles Street
St Marys NSW 2760 – Australia

Tel: +61 2 9673 5300

salesfoamapac@perimeter-solutions.com

perimeter-solutions.com

NOTICE PERIMETER SOLUTIONS MAKES NO REPRESENTATIONS OR WARRANTIES AS TO THE COMPLETENESS OR ACCURACY OF THE INFORMATION INCLUDED HEREIN. THE INFORMATION CONTAINED HEREIN IS NOT INTENDED TO PROVIDE REGULATORY, LEGAL OR EXPERT ADVICE RELATING TO THE PRODUCTS, ITS APPLICATION OR USES. NOTHING CONTAINED HEREIN IS TO BE CONSTRUED AS A RECOMMENDATION TO USE ANY PRODUCT, PROCESS, EQUIPMENT OR FORMULATION IN CONFLICT WITH ANY INDUSTRIAL PROPERTY OR INTELLECTUAL PROPERTY RIGHTS, AND PERIMETER SOLUTIONS MAKES NO REPRESENTATION OR WARRANTY, EXPRESS OR IMPLIED, THAT THE USE THEREOF WILL NOT INFRINGE ON ANY INDUSTRIAL PROPERTY OR INTELLECTUAL PROPERTY RIGHTS. NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESSED OR IMPLIED, OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OF ANY OTHER NATURE ARE MADE HEREUNDER WITH RESPECT TO THE INFORMATION CONTAINED HEREIN.