

# HIGH BACK PRESSURE FOAM MAKER

## FEATURES

- 150 lb flanged inlet and outlet
- Compatible with Solberg foam concentrates for subsurface injection
- Engineered to operate with total back pressure up to 25% of inlet pressure
- Inlet orifice machined and sized to match specific flow and pressure rates
- Optional stainless steel material (upon request)



## DESCRIPTION

Perimeter Solutions High Back Pressure Foam Makers (HBPFM) are available in four models with nominal flow rates ranging from 100 - 400 gpm (379 -1514 lpm) with flange inlets and outlets. The carbon steel discharge tube has four air induction holes placed 90 degrees apart to allow air into the foam solution stream to generate expanded foam.


## APPLICATION

Perimeter Solutions HBPFM is a device designed to provide expanded foam to hydrocarbon cone roof storage tanks for subsurface application. The HBPFM is located outside the diked area and piped to a dedicated fire protection line or tank product line. The HBPFM is capable of producing expanded foam. HBPFMs are designed to discharge expanded foam against a back pressure up to 25% of operating inlet pressure. Perimeter Solutions HBPFM operate at pressures of 50 - 300 psi (3 - 21 bar). A 100 psi (7 bar) minimum operating pressure is typically required for satisfactory operation.

## DIMENSIONAL INFORMATION

APPROXIMATE DIMENSIONS Inches (Millimeters)

MODEL	FLOW AT PRESSURE	INLET	OUTLET	LENGTH
SFS-100-20	100 gpm at 150 psig (379 lpm at 10 bar)	2.0 (51)	2.0 (51)	15.69 (399)
SFS-200-25	200 gpm at 150 psig (757 lpm at 10 bar)	2.5 (64)	2.5 (64)	20.81 (529)
SFS-300-30	300 gpm at 150 psig (1136 lpm at 10 bar)	3.0 (76)	3.0 (76)	23.02 (585)
SFS-400-40	400 gpm at 150 psig (1514 lpm at 10 bar)	4.0 (1016)	4.0 (1016)	29.02 (737)

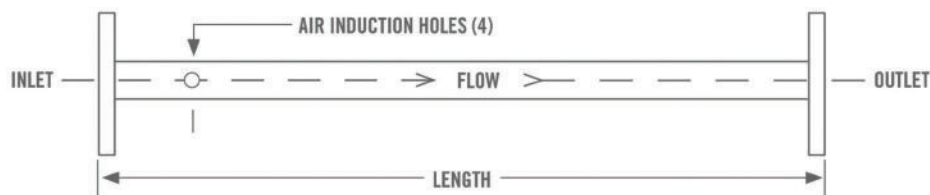

**Note:** Inlets and Outlets are 150# Flanges

# HIGH BACK PRESSURE FOAM MAKER

For the flow rate at other pressures, use the "K" Factor listed below for each model in the formula  $Q = K \sqrt{P}$  where Q is the flow in gpm (lpm), K is a constant factor and P is the inlet pressure for psig (bar).

MODEL	"K" FACTOR
SFS-100-20	8.18
SFS-200-25	16.33
SFS-300-30	24.49
SFS-400-40	46.13

The back pressure within a system is calculated by the formula:  

$$\text{BACK PRESSURE (psig/bar)} = (\Delta P/FT) (X+Y) + \frac{(\text{DENSITY})(Z)}{2.3}$$

Where  $\Delta P$  = pressure drop in pipe size used (psig/bar). X = the fitting (in equivalent feet (meters) of pipe), Y = pipe length in feet and Z = fuel depth. Total back pressure must be  $\leq 25\%$  of inlet pressure.

SOLBERG High Back Pressure Foam Makers operate at 50 - 300 psi (3 - 21 bar) and produce foam expansion of 2.2 - 4.0:1 ratios.

All back pressure and inlet velocities are based on a normal 4:1 expansion.

## ORDERING INFORMATION

HIGH BACK PRESSURE FOAM MAKER		APPROXIMATE SHIPPING WEIGHT	
PART NO.	DESCRIPTION	lb	kg
32170	HBP Foam Maker, Model SFS-100-20	32	14
32171	HBP Foam Maker, Model SFS-200-25	34	15
32172	HBP Foam Maker, Model SFS-300-30	36	16
32173	HBP Foam Maker, Model SFS-400-40	38	17



**Solutions That Save.**

### FOR MORE INFORMATION

Contact any of our worldwide Perimeter Solutions Fire Safety offices or visit:

[www.Perimeter-Solutions.com](http://www.Perimeter-Solutions.com)

### UNITED STATES

10667 Jersey Blvd.  
 Rancho Cucamonga, CA 91730  
 Tel: +1 800 682 3626  
 Tel: +1 909 983 0772  
[salesfoamusa@perimeter-solutions.com](mailto:salesfoamusa@perimeter-solutions.com)

### EMEA

Polígono de Baiña, Parcela 23  
 33682 Mieres (Asturias)  
 Spain  
 Tel: +34 985 24 29 45  
[salesfoamemea@perimeter-solutions.com](mailto:salesfoamemea@perimeter-solutions.com)

### ASIA PACIFIC

3 Charles Street  
 St Marys NSW 2760 – Australia  
 Tel: +61 2 9673 5300  
[salesfoamapac@perimeter-solutions.com](mailto:salesfoamapac@perimeter-solutions.com)

[perimeter-solutions.com](http://perimeter-solutions.com)

**NOTICE** PERIMETER SOLUTIONS MAKES NO REPRESENTATIONS OR WARRANTIES AS TO THE COMPLETENESS OR ACCURACY OF THE INFORMATION INCLUDED HEREIN. THE INFORMATION CONTAINED HEREIN IS NOT INTENDED TO PROVIDE REGULATORY, LEGAL OR EXPERT ADVICE RELATING TO THE PRODUCTS, ITS APPLICATION OR USES. NOTHING CONTAINED HEREIN IS TO BE CONSTRUED AS A RECOMMENDATION TO USE ANY PRODUCT, PROCESS, EQUIPMENT OR FORMULATION IN CONFLICT WITH ANY INDUSTRIAL PROPERTY OR INTELLECTUAL PROPERTY RIGHTS, AND PERIMETER SOLUTIONS MAKES NO REPRESENTATION OR WARRANTY, EXPRESS OR IMPLIED, THAT THE USE THEREOF WILL NOT INFRINGE ON ANY INDUSTRIAL PROPERTY OR INTELLECTUAL PROPERTY RIGHTS. NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESSED OR IMPLIED, OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OF ANY OTHER NATURE ARE MADE HEREUNDER WITH RESPECT TO THE INFORMATION CONTAINED HEREIN.