

# VARIABLE RANGE PROPORTIONER

## FEATURES

- FM Approved with RE-HEALING RF3, 3% and ARCTIC 3x3% ATC Foam Concentrates
- UL Listed with RE-HEALING RF3, 3%, RE-HEALING 3x3 SP-100, ARCTIC 3% AFFF and ARCTIC 3x3% ATC Foam Concentrates
- Bronze and stainless steel material construction for performance and durability
- Fresh, salt and brackish water compatible
- Horizontal or vertical mounted position


## DESCRIPTION

The Perimeter Solutions Variable Range Proportioner is a low foam solution proportioning device, designed to accurately proportion the foam concentrate into the water stream at both high and low system flow rates. The Perimeter Solutions Variable Range Proportioner is designed as an integral component of the Perimeter Solutions Bladder Tank proportioning system, to be used with SOLBERG foam concentrates in foam-water systems.

The Perimeter Solutions Variable Range Proportioner complies with NFPA 30, the Flammable and Combustible Liquids Code, Paragraph 16.5.1.6.2, which states that foam/water sprinkler systems are to provide foam solution to operating sprinklers with 4 sprinklers flowing. The Perimeter Solutions Variable Range Proportioner was designed to meet this Code requirement.

## APPLICATION

The Perimeter Solutions Variable Range Proportioner is designed for closed-head foam-water sprinkler systems where proportioning of foam concentrate will begin at low flow rates, but as additional sprinklers operate, the proportioner will automatically adjust for the changes in system flow rates and

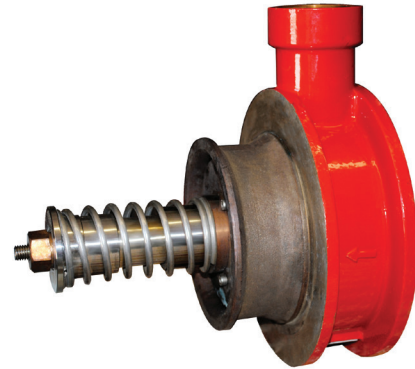

maintain accurate foam concentrate proportioning. Considering that the fire data shows that only 4 to 5 sprinklers will be necessary to control the flammable liquid fire risks, the Perimeter Solutions Variable Range Proportioner is the perfect solution for low system flow proportioning.

The primary applications for the Perimeter Solutions Variable Range Proportioner include closed-head foam/water sprinkler systems, protecting risks such as flammable and combustible liquid storage rooms, chemical processing, loading racks, aircraft hangars, and tank farm protection systems using foam chambers.

## SPECIFICATIONS

The Perimeter Solutions Variable Range Proportioner is certified for use with SOLBERG RE-HEALING RF3, 3%, RE-HEALING 3x3 SP-100, ARCTIC 3% AFFF and ARCTIC 3x3 ATC\* foam concentrates, when used as an integral component of a SOLBERG bladder tank proportioning system. The Perimeter Solutions Variable Range Proportioner is designed to be installed as a between-the-flange proportioner, in standard 6.0" (152 mm) system piping. The foam concentrate inlet is 2.0" (50 mm) NPT female pipe size.

# VARIABLE RANGE PROPORTIONER

The proportioner will accurately proportion foam concentrate at flow rates between 80 to 2,100 gpm (302 to 7949 lpm) for 3% AFFF concentrate, between 50-1195 (189-4523) for RE-HEALING 3x3 SP-100, between 80 to 1,698 gpm (302 to 6428 lpm) for 3x3 ATC concentrate and between 119-2350 gpm (450-8896 lpm) for RE-HEALING RF3, 3% foam concentrate.

The Perimeter Solutions Variable Range Proportioner is manufactured using a bronze body and cone shaped piston, stainless steel spring, and stainless steel foam metering orifice. The Perimeter Solutions Variable Range Proportioner is to be installed with a minimum of 5 pipe diameters (30.0" (762 mm)) of straight pipe both upstream and downstream of the proportioner. The proportioner body is cast with a directional flow arrow on the proportioner body indicating the proper orientation of installation.

The Perimeter Solutions Variable Range Proportioner operation in closed-head sprinkler systems is as follows:

Under static, no flow conditions in the water supply piping, the water and foam concentrate pressures are equal. During a fire situation as sprinklers begin to open, the foam concentrate is injected into the water supply through the foam concentrate metering orifice at the proper listed solution rate.


As more sprinklers begin to operate, the change in foam-water solution demand is automatically adjusted for by the Perimeter Solutions Variable Range Proportioner, by injecting a carefully calibrated increased quantity of foam concentrate into the piping.

## CERTIFICATIONS

Underwriters Laboratories, Inc. (UL) Listed - Standard 162, FM Approved per Approval Standard 5130 with RE-HEALING RF3, 3% and ARCTIC 3x3 ATC Foam Concentrates.


\*See FM Approval Guide for Details

## DIMENSIONAL INFORMATION

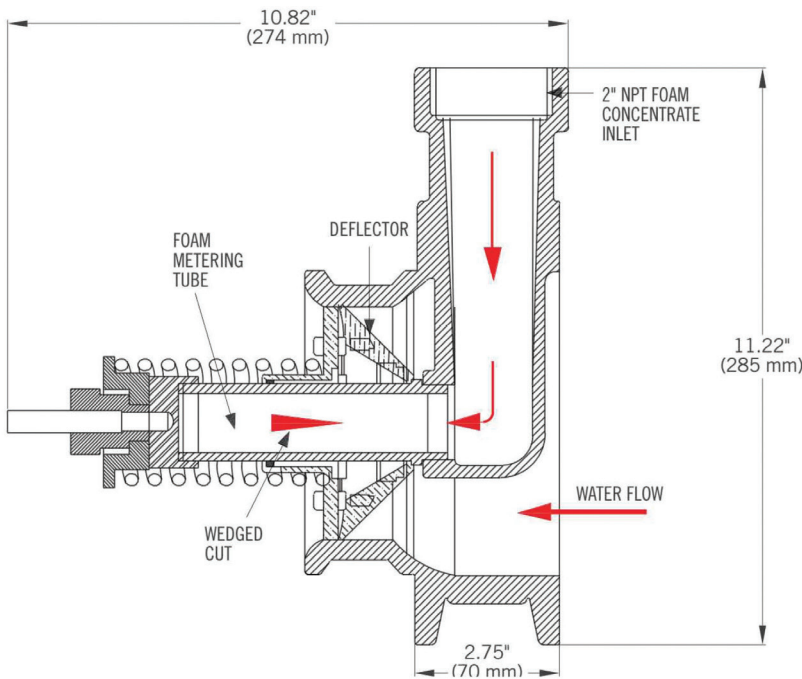

## PRESSURE LOSS CURVE

6" Variable Range Proportioner Pressure Drop

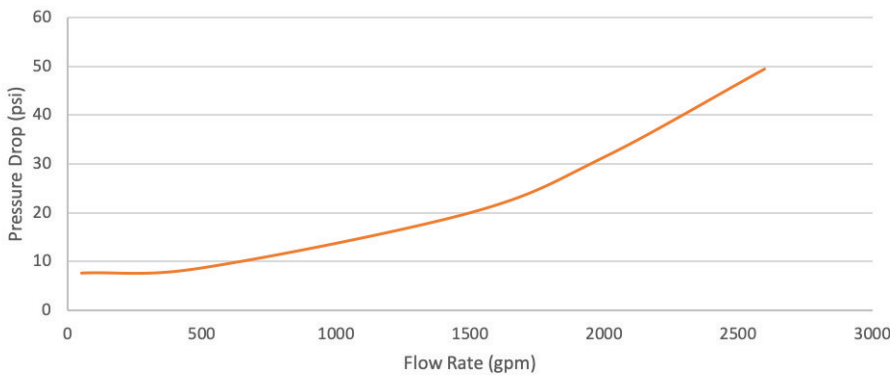

# VARIABLE RANGE PROPORTIONER

## PERFORMANCE INFORMATION

MODEL SRVP	UL LISTED NOMINAL FLOW				FM APPROVED NOMINAL FLOW	
	RE-HEALING 3x3 SP-100 gpm (lpm)	RE-HEALING RF3, 3% gpm (lpm)	ARCTIC 3% AFFF gpm (lpm)	ARCTIC 3x3% ATC gpm (lpm)	RE-HEALING RF3, 3% gpm (lpm)	ARCTIC 3x3% ATC gpm (lpm)
Proportioning Rate (pre-calibrated)	50-1195 (189-4523)	119-2350 (450-8896)	87-2171 (329-8218)	84-1761 (318-6666)	108-1700 (405-6435)	94-1355 (356-5129)

Size	6.0" (150 mm)
Foam Inlet Female	Threaded
Inlet Working Pressure (max.)	-
Inlet Working Pressure (min.)	-
Pipe Length Upstream	30.0" (762 mm)
Pipe Length Downstream	30.0" (762 mm)
Flange Size	6.0" (150 mm)
Between Flange Dimensions	2.75" (69 mm)
Height	11.0" (280 mm)
Weight	29 lb (13 kg)
Material	Bronze

Note: DO NOT Exceed 35.0' (11 m) of equivalent length of pipe and fittings

## ORDERING INFORMATION

### VARIABLE RANGE PROPORTIONER

### APPROXIMATE SHIPPING WEIGHT

PART NO.	DESCRIPTION	APPROXIMATE SHIPPING WEIGHT		
		lb	kg	
30200	Ratio Controller - Variable Range, Model SVRP 6.0" (150 mm), ARCTIC 3% AFFF	UL	28.6	13
30201	Ratio Controller - Variable Range, Model SVRP 6.0" (150 mm), ARCTIC 3x3 ATC	UL, FM	28.6	13
30210	Ratio Controller - Variable Range, Model SVRP 6.0" (150 mm), RE-HEALING RF3, 3%	FM	28.6	13
30211	Ratio Controller - Variable Range, Model SVRP 6.0" (150 mm), RE-HEALING RF3, 3%	FM	28.6	13
30212	Ratio Controller - Variable Range, Model SVRP 6.0" (150 mm), RE-HEALING 3x3 SP-100, 3%	FM	28.6	13

† Not an FM Approved Component

# VARIABLE RANGE PROPORTIONER

---



**Solutions That Save.**

## FOR MORE INFORMATION

Contact any of our worldwide  
Perimeter Solutions Fire Safety offices  
or visit:

[www.Perimeter-Solutions.com](http://www.Perimeter-Solutions.com)

## UNITED STATES

10667 Jersey Blvd.  
Rancho Cucamonga, CA 91730

Tel: +1 800 682 3626

Tel: +1 909 983 0772

[salesfoamusa@perimeter-solutions.com](mailto:salesfoamusa@perimeter-solutions.com)

## EMEA

Polígono de Baiña, Parcela 23  
33682 Mieres (Asturias)

Spain

Tel: +34 985 24 29 45

[salesfoamemea@perimeter-solutions.com](mailto:salesfoamemea@perimeter-solutions.com)

## ASIA PACIFIC

3 Charles Street  
St Marys NSW 2760 – Australia

Tel: +61 2 9673 5300

[salesfoamapac@perimeter-solutions.com](mailto:salesfoamapac@perimeter-solutions.com)

[perimeter-solutions.com](http://perimeter-solutions.com)

**NOTICE** PERIMETER SOLUTIONS MAKES NO REPRESENTATIONS OR WARRANTIES AS TO THE COMPLETENESS OR ACCURACY OF THE INFORMATION INCLUDED HEREIN. THE INFORMATION CONTAINED HEREIN IS NOT INTENDED TO PROVIDE REGULATORY, LEGAL OR EXPERT ADVICE RELATING TO THE PRODUCTS, ITS APPLICATION OR USES. NOTHING CONTAINED HEREIN IS TO BE CONSTRUED AS A RECOMMENDATION TO USE ANY PRODUCT, PROCESS, EQUIPMENT OR FORMULATION IN CONFLICT WITH ANY INDUSTRIAL PROPERTY OR INTELLECTUAL PROPERTY RIGHTS, AND PERIMETER SOLUTIONS MAKES NO REPRESENTATION OR WARRANTY, EXPRESS OR IMPLIED, THAT THE USE THEREOF WILL NOT INFRINGE ON ANY INDUSTRIAL PROPERTY OR INTELLECTUAL PROPERTY RIGHTS. NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESSED OR IMPLIED, OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OF ANY OTHER NATURE ARE MADE HEREUNDER WITH RESPECT TO THE INFORMATION CONTAINED HEREIN.